

Rely on
WITT for gas safety
technology.



HOW IMPORTANT IS SAFE GAS SUPPLY?

ANDREAS HEYER: SENIOR PRODUCT MANAGER – WITT-GASETECHNIK


CENTRAL GAS SUPPLY SYSTEMS INCREASE SAFETY AND PRODUCTIVITY!


Continuous gas supply, improved safety by less transportation of gas cylinders, more space at the point of use, flexibility and expandability – central gas supply systems offer numerous benefits. Field-proven solutions by WITT ensure the optimal realisation from gas inlet to outlet point, from conception to implementation.

As market leader with longtime experience WITT offers all components for central gas supply systems – gas mixers, pressure regulator stations, flashback arrestors, outlet points, electronic control and special equipment. Complete systems by WITT meet the most challenging requirements ensuring best quality, high flow rates and minimum pressure loss.

Our BAM-tested and certified products set standards. Rely on German quality and contact persons globally.

WITT – CENTRAL GAS SUPPLY SYSTEMS FROM A SINGLE SOURCE!

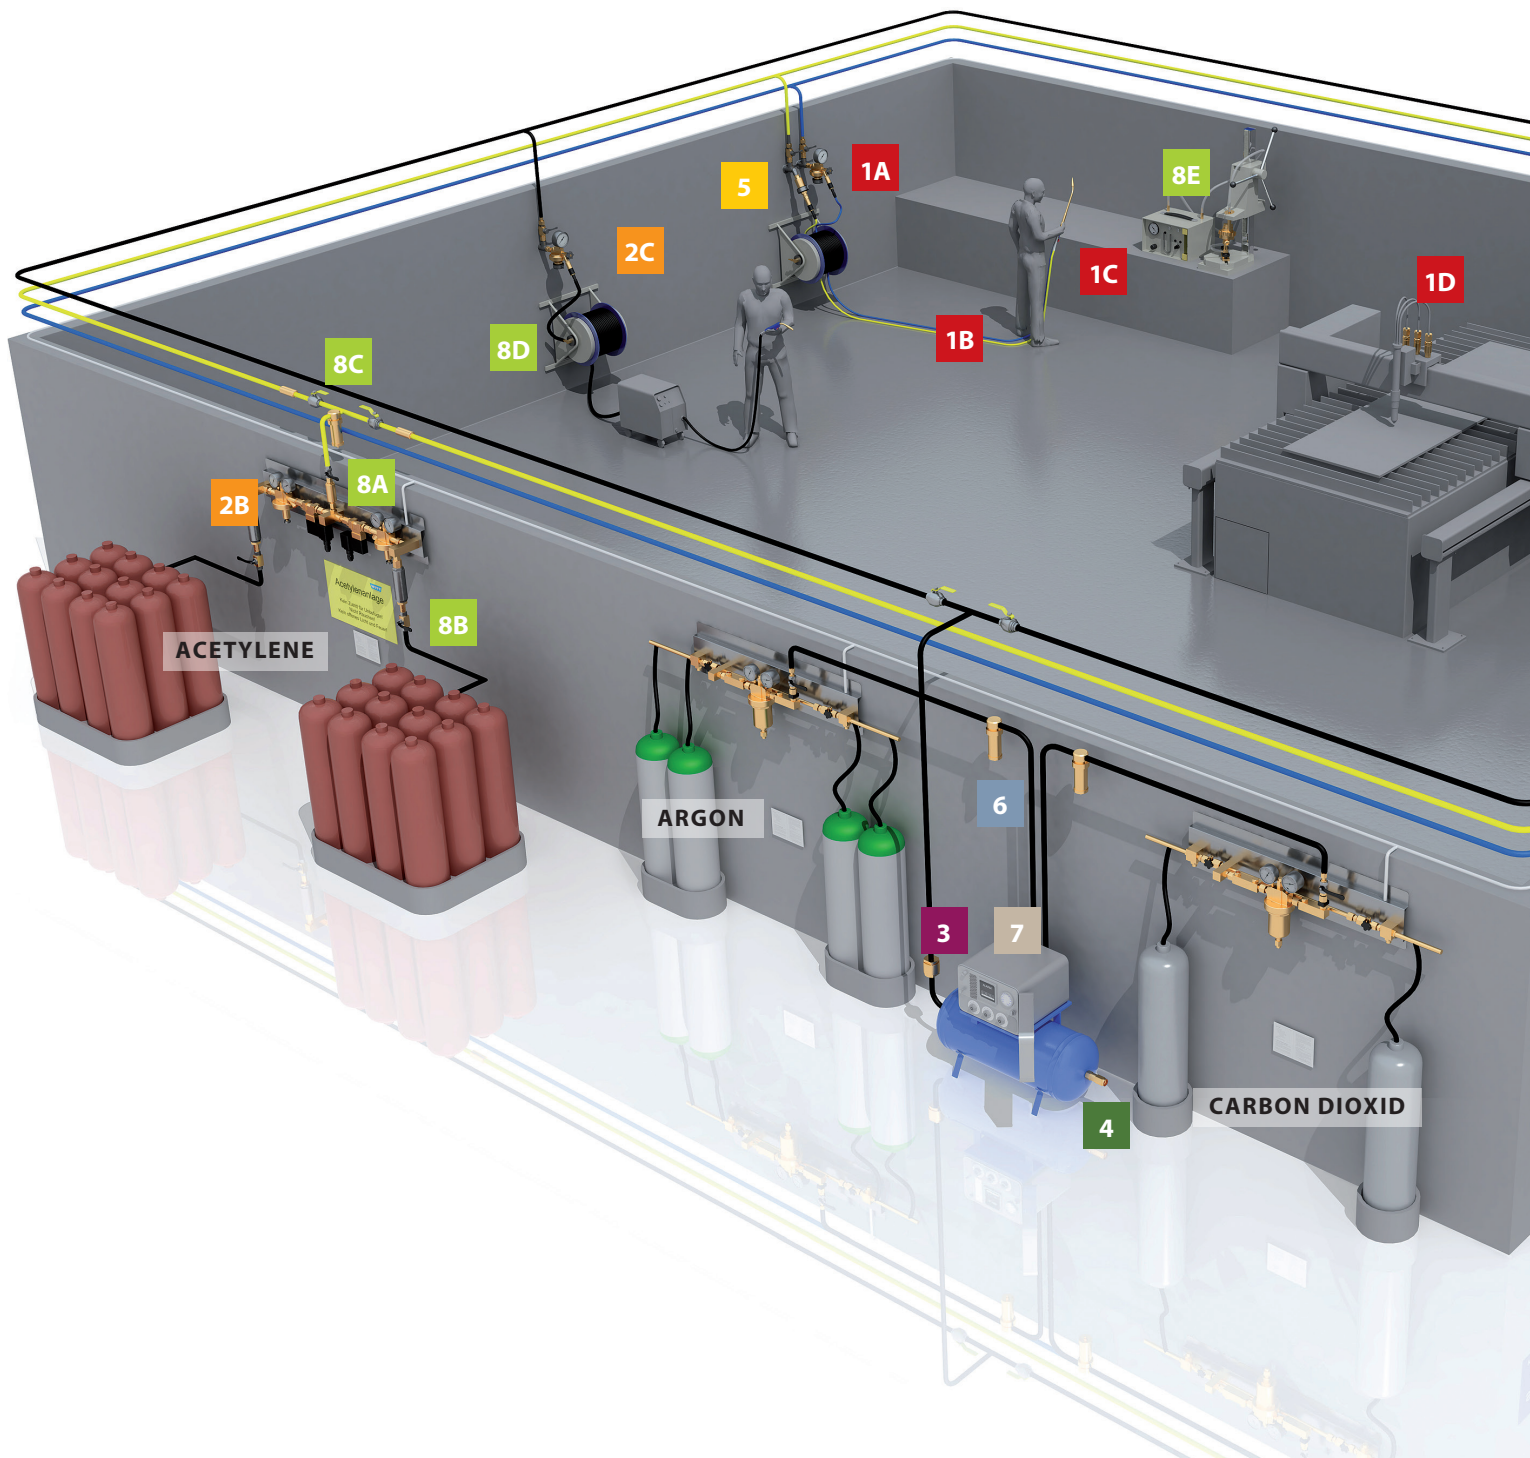

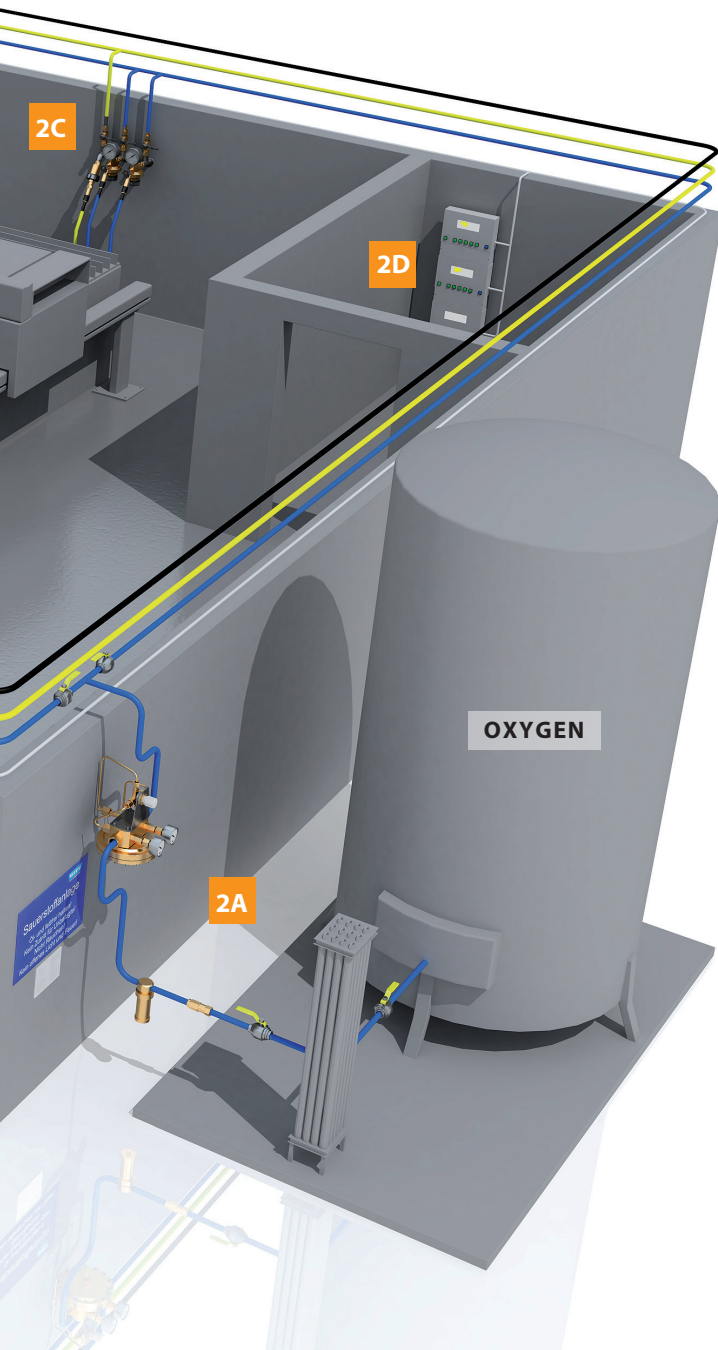

- 1 > FLASHBACK ARRESTORS**
- 1A** For regulators, outlet points, pipelines
- 1B** For hoses
- 1C** For torches
- 1D** For cutting machines

- 2 > PRESSURE REGULATOR STATIONS AND OUTLET POINTS**
- 2A** Dome pressure regulators
- 2B** Pressure regulator stations
- 2C** Outlet points
- 2D** Electronic switch and control

- 3 > NON-RETURN VALVES**

- 4 > SAFETY RELIEF VALVES**


- 5 > QUICK COUPLINGS**
(for outlet points, pipelines, torches)

- 6 > GAS FILTERS**

- 7 > GAS MIXERS**

- 8 > SPECIAL EQUIPMENT**
- 8A** Decomposition Arrestors
- 8B** Automatic slam shut valves
- 8C** Ball valves
- 8D** Safety hose reels
- 8E** Test equipment


PRODUCT PORTFOLIO

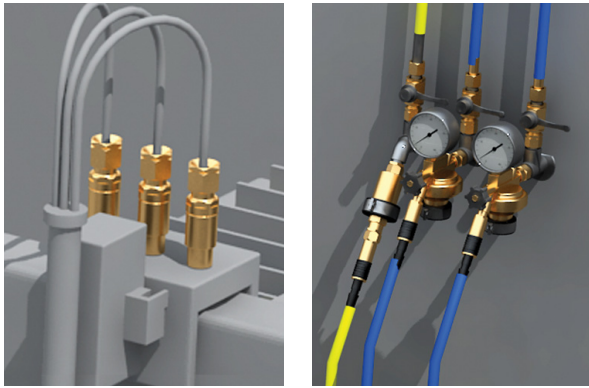

1 FLASHBACK ARRESTORS

Protection of single cylinders, outlet points or pipelines against reverse gas flow and flashbacks:

- Combination of all safety elements for optimal protection
- Extinguish dangerous flashbacks or backfire
- Avoid explosive mixtures in the gas supply
- Wide product range for all kinds of applications
- For all technical gases
- Installation independent of the orientation
- Long service life due to protection against dirt – via filter at gas inlet
- All connections available
- Available in brass or stainless steel

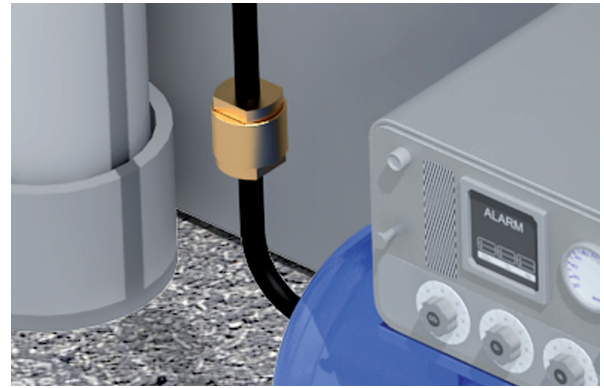

3 NON-RETURN VALVES

Protection of equipment, pipelines and outlet points against reverse gas flow:

- Avoid the formation of explosive mixtures in the gas supply
- Varying from 0.04–4351 psi and flows between 0.01 scfh – 16697.82 scfh with any wanted connection
- For all technical gases – wide range of applications
- Low pressure drops – using complex valve assembly with low opening pressures
- No leaks – using of a spring loaded valve assembly with elastomer sealing
- Installation independent of the orientation
- All connections available
- Available in brass or stainless steel



2 PRESSURE REGULATORS

Constant gas flow and control of central gas supplies:


- Continuous gas supply and control of a pipeline
- With manual or automatic change-over
- Completely mounted and tested
- Compact design
- Reduces the risk of accidents



4 SAFETY RELIEF VALVES

Avoiding over-pressure by gas blowdown from pipelines and other equipment:


- Venting of excess pressure to protect down-stream equipment
- Individual opening pressure from 0.07 psi to 650 psi
- Compact size
- Installation independent of the orientation
- Protective dust cap
- Range of inlet connections
- Available in brass or stainless steel
- Also as a smart valve with visual indication of the status and digital signal for transmission to a network

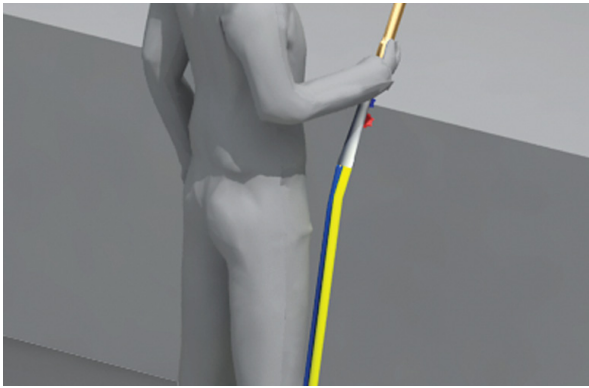

5 QUICK COUPLINGS

Safe and quick connection of equipment:

- Lightning fast connection and disconnection of equipment
- Gas-tightness when disconnected
- No build-up of explosive gas-mixtures in the pipe line – because of non-return valve
- No confusion between connections – because of different probes for Oxygen, Fuel and Inert Gases
- Simplest selection of the right body and probe – because of new colour coded probe
- All connections available
- Dirt-filter protects hose coupling and equipment

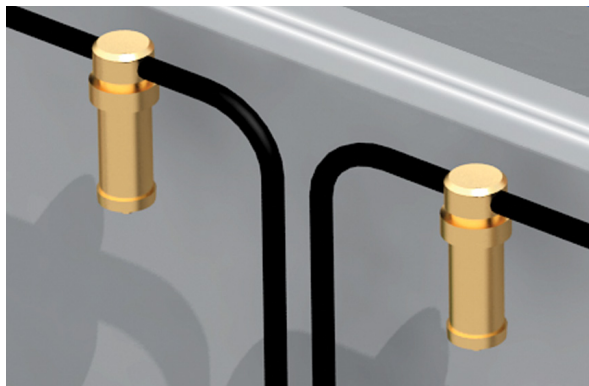

6 GAS FILTERS

Reliable filtration of the finest dirt particles in gases:


- For pipelines and gas outlet points. Some with condensation outlet
- For particles from 0.5–80 micron
- Diverse applications – useful for many technical gases
- High flow rates
- Extend the service life of downstream equipment – by reliable filtration performance
- Change of filter possible while installed
- Large choice of connections



7 GAS MIXERS

High quality mixing systems for 2 or 3 gases particularly for all areas with sharply fluctuating mixed gas flows:



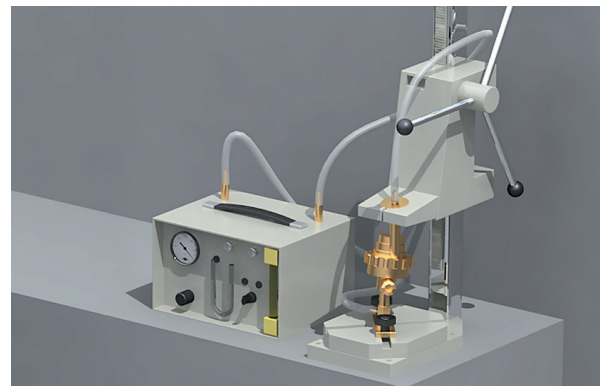





- Easy operation
- A proportional mixing valve or three single mixing valves provide infinitely variable mixture settings
- Gas mixture withdrawal possible from zero to the maximum flow capacity
- High process reliability
- Independent of pressure fluctuations in the gas supply
- Intermittent gas mixture withdrawal possible
- Splash-proof and robust stainless steel housing
- For flammable gases available as EEx-version with separate control cabinet
- Integrated gas analysis for the control and documentation of the gas mixture production
- Monitoring of the gas supply with alarm



8 TEST EQUIPMENT






For the testing of all safety elements including flashback arrestors and non-return valves.

- Cost effective
- Only one test rig for all tests
 - Leak tightness to atmosphere
 - Test of non-return valve against low and high back pressure
 - Function of pressure sensitive gas cut off valve
 - Measurement of flow capacity of safety device
- Clear readings
- Robust design
- Maintenance free

Material	Model	Remarks	Gases / Max. working pressures / Flows						Safety elements					
			Acetylene (A)	Oxygen (O)	LPG (P)	Hydrogen (H)	Natural Gas (M)	Inlet Gas Filter – depending on connection	Flame Arrestor (FA)	Non-Return Valve (NV)	Temperature activated Cut-off Valve (TV)	Pressure actuated Cut-off Valve (PV)	Pressure Relief Valve	
Brass		RF53N		21 psi / 458 scfh	362 psi	72 psi	43 psi	72 psi	X	X	X	X		
		RF53DN		21 psi / 405scfh	145 psi	72 psi	43 psi	72 psi	X	X	X	X		X
		RF53NSK	quick connect (ISO 7289)	21 psi / 458 scfh	290 psi	72 psi	43 psi	72 psi	X	X	X	X		
		85-10		21 psi / 776 scfh	362 psi	72 psi	4 psi	72 psi	X	X	X	X		
		85-20		2 psi / 1588 scfh	232 psi	58 psi	58 psi	58 psi	X	X	X	X		
		85-30		21 psi / 2470 scfh	362 psi	50 psi	58 psi	72 psi	X	X	X	X		
Stainless steel		RF53N-ES		21 psi / 458 scfh	362 psi	72 psi	43 psi	72 psi	X	X	X	X		
		RF53N/H-ES				116 psi	145 psi	174 psi	X	X	X	X		
		RF85-10N-ES		21 psi / 776 scfh	362 psi	72 psi	58 psi	72 psi	X	X	X	X		

Material	Model	Remarks	Gases / Max. working pressures / Flows					Safety elements					
			Acetylene (A)	Oxygen (O)	LPG (P)	Hydrogen (H)	Natural Gas (M)	Inlet Gas Filter – depending on connection	Flame Arrestor (FA)	Non-Return Valve (NV)	Temperature activated Cut-off Valve (TV)	Pressure actuated Cut-off Valve (PV)	Pressure Relief Valve
Stainless steel	 RF85-10N/H-ES				72 psi	145 psi	145 psi	X	X	X	X		
	 RF85-20N-ES		29 psi / 1588 scfh	232 psi	58 psi	58 psi	58 psi	X	X	X	X		
	 RF85-30N-ES		21 psi / 2470 scfh	362 psi	50 psi	58 psi	72 psi	X	X	X	X		
	 RF 85-30N/H-ES				72 psi	159 psi	116 psi	X	X	X	X		
	 F100N-ES						246 psi		X		X		
Brass	 Super 55	resettable (only PV)	21 psi / 352 scfh	219 psi	72 psi	43 psi	72 psi	X	X	X	X		
	 Super 90	resettable (only PV)	21 psi / 388 scfh	145 psi	58 psi	72 psi	72 psi	X	X	X	X	X	
	 Super 78	resettable (only PV)	21 psi / 388 scfh	145 psi	58 psi	72 psi	72 psi	X	X	X	X	X	





1 > **FLASHBACK ARRESTORS** | for regulators, outlet points, pipelines, DIN EN ISO 5175-1

Material	Model	Remarks	Gases / Max. working pressures / Flows							Safety elements				
			Acetylene (A)	Oxygen (O)	LPG (P)	Hydrogen (H)	Natural Gas (M)	Inlet Gas Filter – depending on connection	Flame Arrestor (FA)	Non-Return Valve (NV)	Temperature activated Cut-off Valve (TV)	Pressure actuated Cut-off Valve (PV)	Pressure Relief Valve	
Brass		Super 66	resettable	29 psi / 105 scfh	145 psi	72 psi	72 psi	72 psi	X	X	X	X	X	
		RF53N/30				43 psi		58 psi	X	X	X	X		
		85-10N/30				21 psi	2.9 psi	21 psi	X	X	X	X		
		270N 270 NU				29 psi	21 psi	43 psi		X	X	X		
		623N 623 NU				29 psi	21 psi	50 psi		X	X	X		

1 > **FLASHBACK ARRESTORS** | for hoses









Brass		E460-2	hose nipple	21 psi / 317 scfh	290 psi	72 psi	58 psi	72 psi	X	X	X			
-------	---	--------	-------------	-------------------	---------	--------	--------	--------	---	---	---	--	--	--

Material	Model	Remarks	Gases / Max. working pressures / Flows						Safety elements					
			Acetylene (A)	Oxygen (O)	LPG (P)	Hydrogen (H)	Natural Gas (M)	Inlet Gas Filter – depending on connection	Flame Arrestor (FA)	Non-Return Valve (NV)	Temperature activated Cut-off Valve (TV)	Pressure actuated Cut-off Valve (PV)	Pressure Relief Valve	
Brass		E460-1	hose nipple	21 psi / 317 scfh	290 psi	72 psi	58 psi	72 psi	X	X	X			
		E460-3		21 psi / 317 scfh	290 psi	72 psi	58 psi	72 psi	X	X	X			
		E460SK	quick connect (ISO 7289)	21 psi / 317 scfh	290 psi	72 psi	58 psi	72 psi	X	X	X			
		E460SKU	quick connect (ISO 7289)	21 psi / 458 scfh	290 psi	72 psi	58 psi	72 psi		X	X			
		RF53NU		21 psi / 458 scfh	362 psi	72 psi	48 psi	72 psi	X	X	X	X		
		85-10NU		21 psi / 776 scfh	362 psi	72 psi	58 psi	72 psi	X	X	X	X		
		85-10NU (Exzenter)	off-centre-nut	21 psi / 776 scfh	362 psi	72 psi	58 psi	72 psi	X	X	X	X		



Material	Model	Remarks	Gases / Max. working pressures / Flows					Safety elements						
			Acetylene (A)	Oxygen (O ₂)	LPG (P)	Hydrogen (H ₂)	Natural Gas (M)	Inlet Gas Filter – depending on connection	Flame Arrestor (FA)	Non-Return Valve (NV)	Temperature activated Cut-off Valve (TV)	Pressure activated Cut-off Valve (PV)	Pressure Relief Valve	
Brass		E460-3		21 psi / 317 scfh	290 psi	72 psi	58 psi	72 psi	X	X	X			
		RF53U		21 psi / 458 scfh	362 psi	72 psi	29 psi	72 psi	X	X	X			
		85-10U		21 psi / 776 scfh	362 psi	72 psi	58 psi	72 psi	X	X	X			
		85-10NU (Exzenter)	off-centre-nut	21 psi / 776 scfh	362 psi	72 psi	58 psi	72 psi	X	X	X			

MORE SAFETY IS NOT POSSIBLE



Application	Model	Remarks	Gases / Max. working pressures / Flows							
			Acetylene (A)	Oxygen (O ₂)	LPG (P)	Hydrogen (H ₂)	Natural Gas (M)	Argon (Ar)	Nitrogen (N ₂)	
Dome pressure regulator		737LE-HD/S	Set including Pilot pressure regulator, inlet and back pressure gauge, connections up to 63", flange DN80/100		Max. inlet pressure 2900 psi Outlet pressure 7.25-870 psi Kv-Value = 1,65	Max. inlet pressure 1450 psi Outlet pressure 7.25-870 psi Kv-Value = 1,65	Max. inlet pressure 4350 psi Outlet pressure 7.25-870 psi Kv-Value = 1,65	Max. inlet pressure 4350 psi Outlet pressure 7.25-870 psi Kv-Value = 1,65	Max. inlet pressure 4350 psi Outlet pressure 7.25-870 psi Kv-Value = 1,65	Max. inlet pressure 4350 psi Outlet pressure 7.25-870 psi Kv-Value = 1,65
		737LE/S 747LE/S 757LE/S 767LE/S			Max. inlet pressure 326 psi Outlet pressure 7.25-435 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 326 psi Outlet pressure 7.25-232 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 2,4 / 3,6 / 15 / 30
		Smart Version Modell 747/757/767			Max. inlet pressure 435 psi Outlet pressure 7.25-420 psi Kv-Value = 3,6 / 15 / 30	Max. inlet pressure 362 psi Outlet pressure 7.25-232 psi Kv-Value = 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 3,6 / 15 / 30
		737LE-HD/S-ES	Set including Pilot pressure regulator, inlet and back pressure gauge, connections up to 63", flange DN80/100		Max. inlet pressure 435 psi Outlet pressure 7.25-420 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 1450 psi Outlet pressure 7.25-377 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 4350 psi Outlet pressure 7.25-870 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 4350 psi Outlet pressure 7.25-870 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 4350 psi Outlet pressure 7.25-870 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 4350 psi Outlet pressure 7.25-870 psi Kv-Value = 2,4 / 3,6 / 15 / 30
		737LE/S-ES 747LE/S-ES 757LE/S-ES 76LE/S-ES			Max. inlet pressure 435 psi Outlet pressure 7.25-420 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 362 psi Outlet pressure 7.25-232 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 2,4 / 3,6 / 15 / 30	Max. inlet pressure 580 psi Outlet pressure 7.25-435 psi Kv-Value = 2,4 / 3,6 / 15 / 30
Manifold pressure regulator		ADR 75	Dome pressure regulator; 36 psi version available	Max. inlet pressure 362 psi Outlet pressure 0-21 psi (0-36 psi) Max. flow 2647 scfh						
		ADR 150	29 psi version available	Max. inlet pressure 362 psi Outlet pressure 0-21 psi (0-29 psi) Max. flow 5294 scfh						
		ADR 150 F	Spring loaded pressure regulator	Max. inlet pressure 362 psi Outlet pressure 0-21 psi Max. flow 5294 scfh						

HIGH PRESSURE PIPING ON CUSTOMER REQUEST

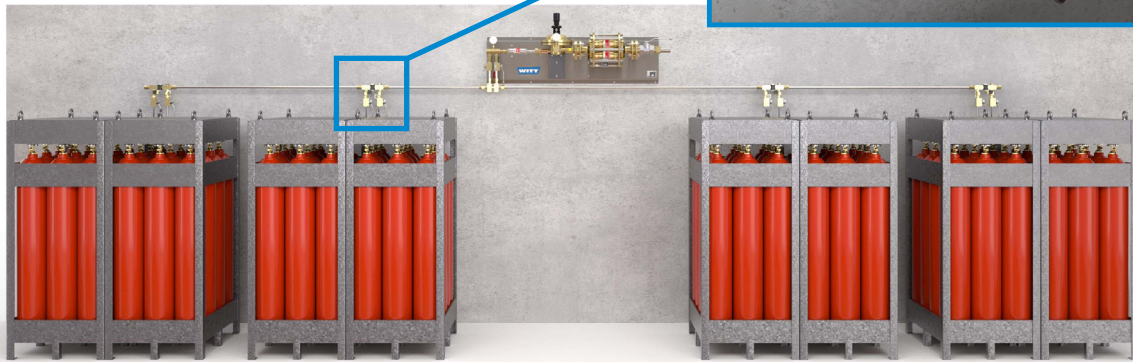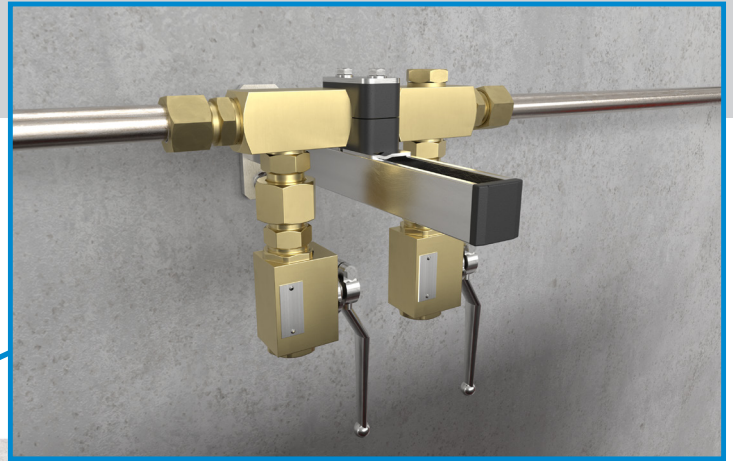







MAXIMUM PRECISION AND CONSISTENCY FOR YOUR GAS PRESSURE



Material	Model	Remarks	Gases / Max. working pressures							Connection	
			Opening pressure	Acetylene (A)	Oxygen (O ₂)	LPG (P)	Hydrogen (H ₂)	Natural Gas (M)	Nitrogen (N ₂)		
Steel	 NV 300		0.06 psi		232 psi	232 psi	232 psi	232 psi	232 psi	232 psi	G 1-G 1.1/4
	 ULTRA 30		0.07 psi		290 psi	290 psi	290 psi	290 psi	290 psi	290 psi	G 1.1/2 1.1/2" NPT
Stainless steel	 ULTRA 32	free combination of materials for housing (brass, stainless steel, aluminum) and seat (NBR/CR, FPM/FKM, EPDM/FFKM)	0.07 psi	21 psi	290 psi	290 psi	290 psi	290 psi	290 psi	290 psi	G 1.1/2 1.1/2" NPT
	 NV 400		0.06 psi		232 psi	232 psi	232 psi	232 psi	232 psi	232 psi	G 1-G 1.1/4
	 NV 400 intermediate flange		0.06 psi		232 psi	232 psi	232 psi	232 psi	232 psi	232 psi	DN 40/50
	 ULTRA 40		0.07 psi		290 psi	290 psi	290 psi	290 psi	290 psi	290 psi	G 2.1/2 2.1/2" NPT
	 ULTRA 42	free combination of materials for housing (brass, stainless steel, aluminum) and seat (NBR/CR, FPM/FKM, EPDM/FFKM)	0.07 psi		290 psi	290 psi	290 psi	290 psi	290 psi	290 psi	G 2.1/2 2.1/2" NPT

ULTRA PERFORMANCE NOW AS STANDARD






Material		Model	Remarks	Gases / Max. working pressures							Connection
				Opening pressure	Acetylene (A)	Oxygen (O ₂)	LPG (P)	Hydrogen (H ₂)	Natural Gas (M)	Nitrogen (N ₂)	
Stainless steel		NV300-ES		0.06 psi	232 psi	232 psi	232 psi	232 psi	232 psi	232 psi	G 1.-G1.1/4
		ULTRA 30		0.07 psi		290 psi	290 psi	290 psi	290 psi	290 psi	G 1.1/2 1.1/2" NPT
		ULTRA 32	free combination of materials for housing (brass, stainless steel, aluminum) and seal (NBR/CR, FPM/FKM, EPDM/FFKM)	0.07 psi	22 psi	290 psi	290 psi	290 psi	290 psi	290 psi	G 1.1/2 1.1/2" NPT
		NV 400-ES		0.06 psi		232 psi	232 psi	326 psi	232 psi	232 psi	G 1.1/2-G 2
		ULTRA 40		0.07 psi		290 psi	290 psi	290 psi	290 psi	290 psi	G 2.1/2 2.1/2" NPT
		ULTRA 42	free combination of materials for housing (brass, stainless steel, aluminum) and seal (NBR/CR, FPM/FKM, EPDM/FFKM)	0.07 psi		290 psi	290 psi	290 psi	290 psi	290 psi	G 2.1/2 2.1/2" NPT
		800-ES		14,5 psi		3480 psi		232 psi		4350 psi	1/4" NPT

**A SAFE GAS SUPPLY WITH
NON RETURN VALVES**








Material		Model	Remarks	Technical information				Features			
				Opening pressure	Inlet-connection	Outlet-connection	With condensation outlet	Inlet filter (optional)	Manual ventilation	Manufactured and certified according to EN ISO 4126-1 AD 2000 bulletin A2 and VdTUV-bulletin 100	TUV certification
Brass		SV 805	CE-marked according to PED 2014/68/EU CE0045	7.25 psi-652 psi	G 1/4-G 3/4 1/4" NPT-3/4" NPT	M24 x 1	X			X	X
		SV 805A	CE-marked according to PED 2014/68/EU CE0045 with vending adapter	7.25 psi-652 psi	G 1/4-G 3/4 1/4" NPT-3/4" NPT	1/2" NPT			X	X	X
		SV 805A SMART	CE-marked according to PED 2014/68/EU E0045	7.25 psi-652 psi	G 1/4-G 3/4 1/4" NPT-3/4" NPT	1/2" NPT			X	X	X
		AV 319		0.15 psi-1.16 psi	G 1/8	G 1/8					X (optional)
Stainless steel		AV 619		0.07 psi-7.25 psi	G 1/2-G 1	G 1/2-G 1	X	X		X	X (optional)
		SV 805-ES	CE-marked according to PED 2014/68/EU CE0045	7.25 psi-652 psi	G 1/4-G 3/4 1/4" NPT-3/4" NPT	M24 x 1	X			X	X
		SV 805A-ES	CE-marked according to PED 2014/68/EU CE0045 with vending adapter	7.25 psi-652 psi	G 1/4-G 3/4 1/4" NPT-3/4" NPT	1/2" NPT			X	X	X
		SV 805-ES SMART	CE-marked according to PED 2014/68/EU CE0045	7.25 psi-652 psi	G 1/4-G 3/4 1/4" NPT-3/4" NPT	1/2" NPT	X			X	X
		319-ES		0.15 psi-116 psi	G 1/8	G 1/8		X		X	X (optional)

Material	Image	Model	Remarks	Technical information				Features			
				Opening pressure	Inlet-connection	Outlet-connection	With condensation outlet	Inlet filter (optional)	Manual ventilation	Manufactured and certified according to EN ISO 4126-1 AD 2000 bulletin A2 and VdTUV-bulletin 100	TUV certification
Stainless steel		AV 619-ES		0.07 psi–7.25 psi	G 1/2–G 1	G 1/2–G 1		X			X
		AV919-ES		0.07 psi–7.25 psi	G 2	G 2					X
Aluminium anodized		AV 919		0.07 psi–7.25 psi	G 2	G 2					X

THE MOST EFFECTIVE PROTECTION AGAINST OVERPRESSURE



Application	Image	Model	Remarks	Gases / Max. working pressures / Flows					
				Acetylene (A)	Oxygen (O ₂)	LPG (P)	Hydrogen (H ₂)	Natural Gas (M)	Carbon dioxide (CO ₂)
Gas Filter outlet points		622	Fineness 40 micrometer	21 psi / 2188 scfh	232 psi	232 psi	232 psi	232 psi	
Gas Filter for pipelines		77 with bronze element	Bronze filter element, fineness 5 or 50 micrometer, condensate drain	21 psi / 11013 scfh	580 psi	725 psi	725 psi	725 psi	362 psi
		77	Nickel chromium filter element, fineness 0.5, 7-10 or 40 micrometer	21 psi / 16166 scfh	435 psi	725 psi	725 psi	725 psi	362 psi
		625	Condensate outlet, fineness 40 micrometer	21 psi / 16166 scfh	145 psi	362 psi	362 psi	362 psi	
Stainless Steel		HD Gas Filter	Nickel chromium filter element, fineness 30 or 80 micrometer	362 psi	725 psi	4351 psi	4351 psi	4351 psi	1450 psi
		LE 6	Bronze filter element, fineness 15 micrometer		435 psi	580 psi	580 psi	580 psi	362 psi

		For all technical gases					
Model	Remarks	Minimum inlet pressure	Maximum inlet pressure	Maximum flow capacity	Mixing range	Mixing precision	
	KM 100 For 2 or 3 Gases. Option: mounted on buffer tank	29 psi	290 psi	1517 scfh	0-100 %	better +/- 1% abs.	
 	MG 50 - MG 500 For 2 or 3 Gases. Option: mounted on buffer tank	43 psi	290 psi	3530 scfh- 33180 scfh	0-25 % or 0-100 %	better +/- 1% abs.	

OUR PRODUCT RANGE

GAS CONTROL EQUIPMENT

- Gas mixing systems
- Gas metering systems
 - Gas analyzers
- Leak detection systems
 - Gas pressure vessels
- Engineering of customized systems

GAS SAFETY EQUIPMENT

- Flashback arrestors
- Non-return valves / check valves
 - Quick couplers
 - Safety relief valves
- Stainless steel devices
 - Gas filters
- Pressure regulators
 - Outlet points
 - Lance holders
 - Ball valves
- Automatic hose reels
 - Test equipment
 - Accessories
- Customized safety equipment

WITT-Gasetechnik GmbH & Co KG

Salinger Feld 4-8
58454 Witten
Deutschland
Tel. +49 (0)2302 8901-0
www.wittgas.com
witt@wittgas.com

GUSTUS & PARTNER GmbH

Installation – Service – Wartung
Alt Salbke 6-10, Geb. 59
39122 Magdeburg
Deutschland
Tel. +49 (0)391 4015246
gustus@wittgas.com

WITT Tecnología de Gas, S.L.

C/Simón Cabarga N° 2a – Bajo
39005 Santander
España
Tel. +34 942 835142
witt-espana@wittgas.com

WITT FRANCE S.A.R.L.

131 Voie de Compiègne
91390 Morsang sur Orge
France
Tel. +33 (0)160 151779
witt-france@wittgas.com

WITT Gas Techniques Ltd.

Unit 7 Burtonwood Industrial Estate
Phipps Lane, Burtonwood
Warrington, Cheshire
WAS 4HX
Great Britain
Tel. +44 (0)1925 234466
witt-uk@wittgas.com

WITT GAS INDIA PVT.LTD.

855/N, Upen Banerjee Road
Kolkata 700060
West Bengal
India
Tel. +91 9831319810
witt-india@wittgas.com

WITT ITALIA Srl.


Via Giovanni XXIII, 18
24030 Solza (BG)
Italia
Tel. +39 035 4933273
witt-italia@wittgas.com

WITT POLSKA Sp. z o. o.

Ul. Bulwar Dedala 16a
54-130 Wrocław
Poland
Tel. +48 71-352 28 56
witt-polska@wittgas.com

WITT Gas Controls LP

1055 Windward Ridge Parkway
Suite 170
Alpharetta, Georgia 30005
USA
Tel. +1 770 664 4447
witt-usa@wittgas.com

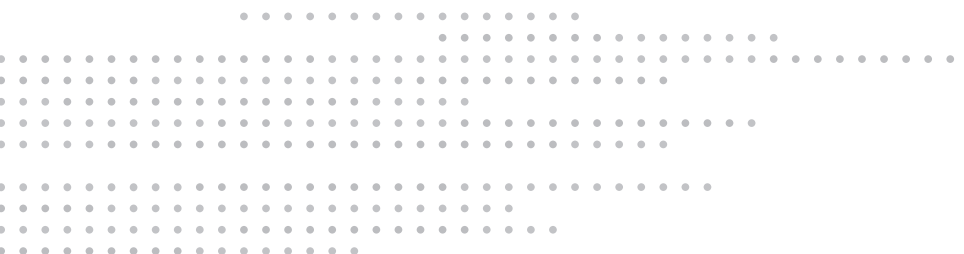

What are your requirements?
Please contact us.

Tel. +1 770 664 4447 | witt-usa@wittgas.com