


NON-RETURN VALVE ULTRA 20

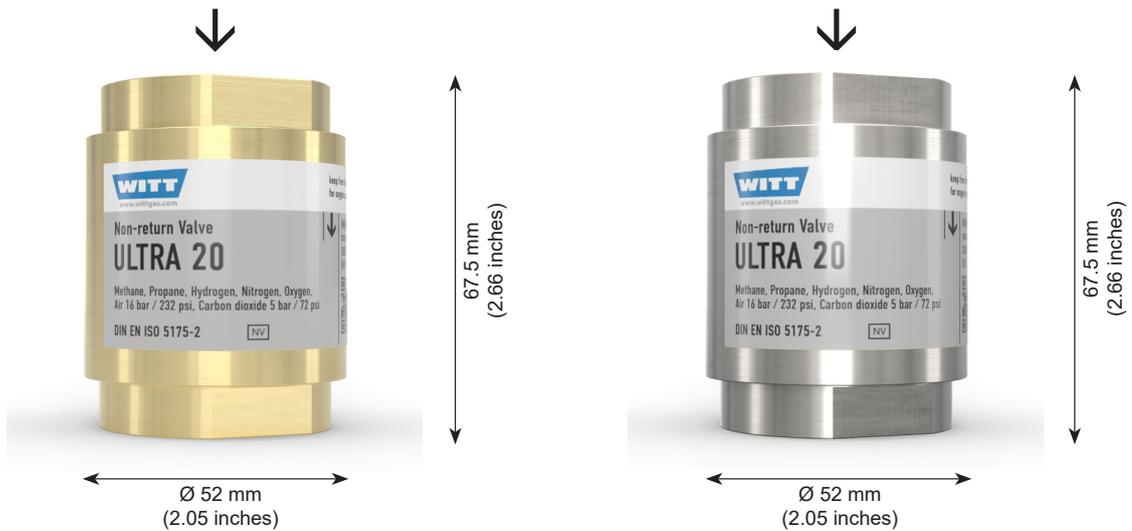

WITT non-return valves for reliable protection against dangerous reverse gas flow. Flow-optimised valve system causes very low pressure drop at minimal noise emission. Every non-return valve 100% tested.

Benefits

- a spring loaded non-return valve prevents back feeding of gases which could lead to unwanted gas mixtures
- low pressure drop – using complex valve assembly with low opening pressures (ca. 4 mbar)
- stainless steel filter (100 µm) in the gas inlet protects the non-return valve against dirt contamination, extending the service life
- flow-optimised valve system for:
 - ultra low pressure drop
 - minimal noise emission
- no leaks – using of a spring loaded valve assembly with elastomer sealing
- in accordance to DIN EN ISO 5175-2
- available in brass or stainless steel
- diverse applications – useful for many technical gases
- reduce installation costs – the spring loaded valve is not affected by gravity and may be installed in any orientation
- the same size as model NV200 for easy replacement

Operation / Usage

- non-return valves are used to protect equipment and pipelines against dangerous reverse gas flow. Use is possible for applications according to EN 746-2
- WITT non-return valves may be mounted in any position / orientation
- in ambient temperatures above -20 °C / 68 °F and below +70 °C / 158 °F

Maintenance

- annual testing of the non-return valve and body leak tightness is recommended
- WITT is happy to supply special test equipment
- non-return valves are only to be serviced by the manufacturer

Approvals

Company certified according to ISO 9001 and PED 2014/68/EU Module H

CE-marked according to:
- PED 2014/68/EU

Designed for Oxygen Service in accordance with EIGA 13/20 and CGA G-4.4: Oxygen Pipeline and Piping Systems
Cleaned for Oxygen Service in accordance with EIGA 33/18 and CGA G-4.1: Cleaning of Equipment for Oxygen Service

Model	Max. working pressure [bar]	Filter 100 µm	Material			Connection [inch]	Order-No.	
			Seals		Housing			Valve
			O-Ring	Valve				
ULTRA 20	Carbon dioxide (CO ₂), Argon (Ar), Helium (He), Town gas (C), Ethylene (E), Natural gas (M) and LPG (P), Hydrogen (H), Nitrogen (N ₂), Carbon Monoxide (CO), Oxygen (O), Compressed air (D)	✓	NBR	CR	Brass 2.0401 CuZn39Pb3	PEEK	G 1/2	036-022
							G 3/4	036-014
							G 1	036-015
							1/2" NPT	036-024
							3/4" NPT	036-020
		✓	NBR	CR	Stainless steel 1.4305 X8 CrNiS 18-9 AISI 303	PEEK	1" NPT	036-021
							G 1/2	036-023
							G 3/4	036-016
							G 1	036-017
							1/2" NPT	036-025
3/4" NPT	036-018							
1" NPT	036-019							



Other gases and connections available upon request

NON-RETURN VALVE ULTRA 20



Comparison NV200 / ULTRA 20

Flow diagram for air (20 °C / 68 °F)

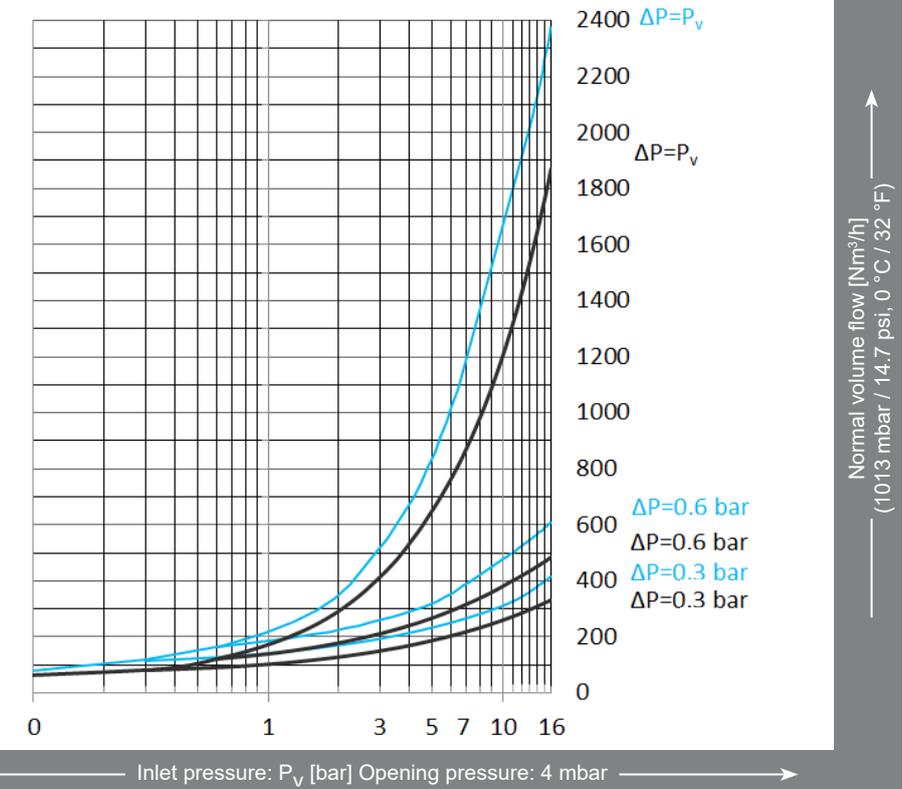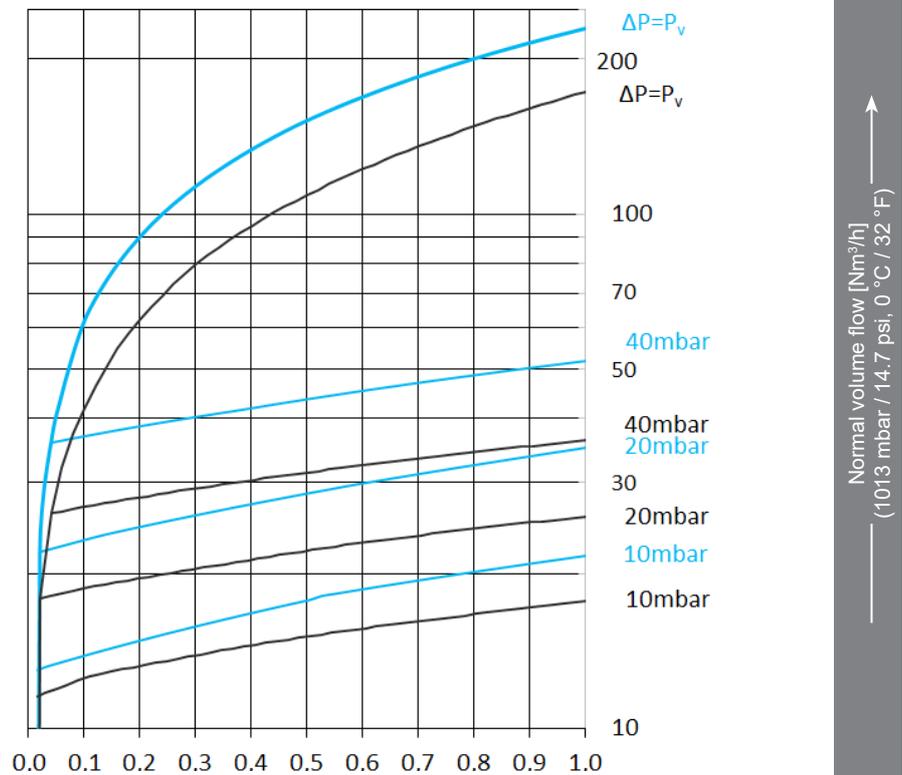

Conversion factors:

Butane	x 0.68
Natural gas	x 1.25
Methane	x 1.33
Propane	x 0.80
Oxygen	x 0.95
Town gas	x 1.54
Hydrogen	x 3.75

GRS12 - F01/1B subject to change