


WITTFIX-Rohrverschraubung

Standard

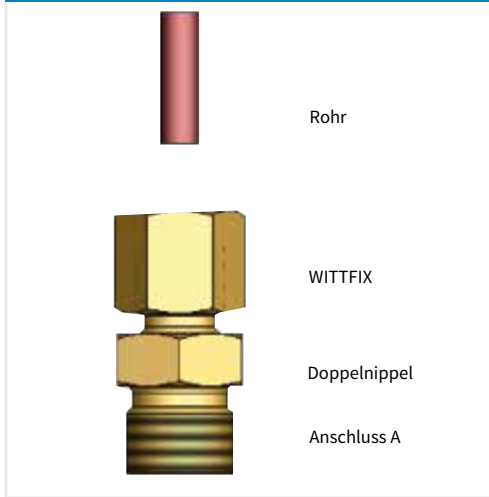

Rohr Ø mm	Anschluss A	Bestell-Nr.
6 x 1,0	G 1/8 RH	956608900
6 x 1,0	1/4"-NPT	956705200
6 x 1,0	G 1/4 RH	956580300
6 x 1,0	G 3/8 RH	956544100
8 x 1,0	G 1/8 RH	956567300
8 x 1,0	1/4"-NPT	956739900
8 x 1,0	G 1/4 RH	956543900
8 x 1,0	G 3/8 RH	956739800
8 x 1,0	G 1/2 RH	956740000
10 x 1,0	1/4"-NPT	956683200
10 x 1,0	G 1/4 RH	956940200
10 x 1,0	3/8"-NPT	956673500
10 x 1,0	G 3/8 RH	956532000
10 x 1,0	G 1/2 RH	956794700
12 x 1,0	1/4"-NPT	956680700
12 x 1,0	G 1/4 RH	956551900
12 x 1,0	G 3/8 RH	956743700
12 x 1,0	1/2"-NPT	956553200
12 x 1,0	G 1/2 RH	956668700
15 x 1,0	3/8"-NPT	956678400
15 x 1,0	1/2"-NPT	956678200
15 x 1,0	G 1/2 RH	956657700
22 x 1,0	G 1 RH	956657800

Für Kupfer- oder Edelstahlleitungen

max. 25 bar Betriebsdruck

EN 560

- A = AG
- Bauteile: Doppelnippel, O-Ring, Druckscheibe, Spannhülse, Überwurfmutter

WITTFIX-Rohrverschraubung

für Sicherheitseinrichtungen



Rohr Ø mm	Anschluss A	Anschluss B	Bestell-Nr.
6 x 1,0	G 1/4 RH		956725400
6 x 1,0	G 3/8 LH		956659700
6 x 1,0	G 3/8 RH		956725500
6 x 1,0		G 1/4 RH	956745700
6 x 1,0		G 3/8 LH	956659600
6 x 1,0		G 3/8 RH	956741800
8 x 1,0	G 1/4 RH		956753600
8 x 1,0	G 3/8 LH		956723700
8 x 1,0	G 3/8 RH		956746300
8 x 1,0	G 1/2 LH		956725700
8 x 1,0	G 1/2 RH		956725600
8 x 1,0		G 1/4 RH	956746200
8 x 1,0		G 3/8 LH	956740100
8 x 1,0		G 3/8 RH	956623000
8 x 1,0		G 1/2 LH	956753900
8 x 1,0		G 1/2 RH	956754000
10 x 1,0	G 1/4 RH		956753700
10 x 1,0	G 3/8 LH		956725800
10 x 1,0	G 3/8 RH		956725900
10 x 1,0	G 1/2 LH		956726100
10 x 1,0	G 1/2 RH		956726000
10 x 1,0		G 1/4 RH	956648100
10 x 1,0		G 3/8 LH	956753400
10 x 1,0		G 3/8 RH	956718100
10 x 1,0		G 1/2 LH	956754900
10 x 1,0		G 1/2 RH	956755000
12 x 1,0	G 1/4 RH		956755100
12 x 1,0	G 3/8 LH		956677400
12 x 1,0	G 3/8 RH		956717900
12 x 1,0	G 1/2 LH		956726400
12 x 1,0	G 1/2 RH		956726300
12 x 1,0		G 1/4 RH	956754800
12 x 1,0		G 3/8 LH	956668600
12 x 1,0		G 3/8 RH	956717100
12 x 1,0		G 1/2 LH	956697500
12 x 1,0		G 1/2 RH	956697600
15 x 1,0	G 3/8 LH		956678900
15 x 1,0	G 3/8 RH		956678500
15 x 1,0	G 1/2 LH		956679100
15 x 1,0	G 1/2 RH		956678700
15 x 1,0		G 3/8 LH	956679000
15 x 1,0		G 3/8 RH	956678600
15 x 1,0		G 1/2 LH	956679200
15 x 1,0		G 1/2 RH	956678800

Zur Einbindung von Sicherheitseinrichtungen in Kupfer- oder

Edelstahlleitungen , max. 25 bar Betriebsdruck

Gewinde-Anschluss nach EN 560

- A = AGS
- B = MG