


# COMPACT LANCE HOLDER KLK

## for oxygen lances 1/4" – 3/4"

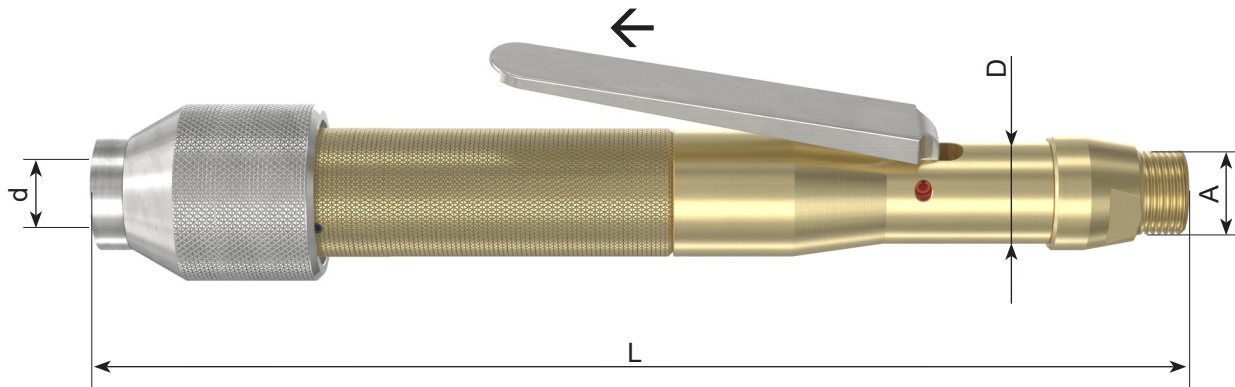

**Compact lance holder for oxygen.**  
**Combination of lance holder, SRV - safety relief valve and lancing valve.**

- working temperature -10 °C – +60 °C

FA	NV	TV
----	----	----

**Flame arrestor**  
**Gas non-return valve**  
**Temperature sensitive cut-off valve**

### Approvals

EN 560, EN 9539

**suitable for all pipes according to**  
 EN 10255

### Part list

Description	Material
Lance-holder body	BR/BZ/N7 (CC493K)
Valve body	OT 58 (CW614N)
Locking nut	AISI 303 (1.4305)
Lance pipe clamp	Spring steel 52SiCrNi5 (1.7117)
Connections and inner parts	OT 58 (CW614N)
Sealing sleeve around lance pipe	Chloroprene rubber (CR)
Opening lever	AISI 304 (1.4301)
Sealing rings	NBR
Flame arrestor	sintered bronze
Thermal fuse	PVC-U
Internal springs	AISI 302 (1.4310)

### Technical Data

d Ø Lance [mm] [inch]	Lance tolerance Ø [mm]	A Inlet connection male with cone [EN 560]	D [mm]	L [mm]	Weight [g]	Max. working pressure [bar]	Order-No.
13.5 1/4"	12.0 - 14.0	3/4"	40	265	1 500	Oxygen (O) 20.0	040210400
17.2 3/8"	16.0 - 17.5	3/4"	55	350	2 300		040210500
21.3 1/2"	20.0 - 21.7	3/4"	55	350	2 300		040210600
27.0 3/4"	26.0 - 27.5	3/4"	60	365	2 700		040210700

Other connections available upon request