

# NON-RETURN VALVE ULTRA 22

## Special version model ULTRA 20



**WITT non-return valves for reliable protection against dangerous reverse gas flow.**

**Flow-optimised valve system causes very low pressure drop at minimal noise emission.**

**Every non-return valve 100% tested.**

**ULTRA 22 is based on ULTRA 20 and is customized according to the requirements of the customer - ideal for special requirements. A modular system which allows flexible material combinations for housing and sealings.**

### Combination possibilities

- housing available in brass, stainless steel or aluminium
- sealings of NBR, CR, FKM, EPDM, FFKM for example
- with or without dirt filter in gas inlet

### Benefits

- precisely tailored design for special requirements. For example corrosive environments, acetylene, ultra-lightweight construction, temperatures above 70 °C / 158 °F
- a spring loaded non-return valve prevents back feeding of gases which could lead to unwanted gas mixtures
- low pressure drop – using complex valve assembly with low opening pressures (approx. 4 mbar)
- stainless steel filter (100 µm) in the gas inlet protects the non-return valve against dirt contamination, extending the service life
- flow-optimised valve system for:
  - ultra low pressure drop
  - minimal noise emission
- no leaks – using of a spring loaded valve assembly with elastomer sealing
- in accordance to DIN EN ISO 5175-2
- diverse applications – useful for many technical gases

- reduce installation costs – the spring loaded valve is not affected by gravity and may be installed in any orientation

### Operation / Usage

- non-return valves are used to protect equipment and pipelines against dangerous reverse gas flow. Use is possible for applications according to EN 746-2
- WITT non-return valves may be mounted in any position / orientation

### Maintenance

- annual testing of the non-return valve and body leak tightness is recommended
- WITT is happy to supply special test equipment
- non-return valves are only to be serviced by the manufacturer

### Approvals

Company certified according to ISO 9001 and PED 2014/68/EU Module H

CE-marked according to:  
- PED 2014/68/EU

Designed for Oxygen Service in accordance with EIGA 13/20 and CGA G-4.4: Oxygen Pipeline and Piping Systems

Cleaned for Oxygen Service in accordance with EIGA 33/18 and CGA G-4.1: Cleaning of Equipment for Oxygen Service



# NON-RETURN VALVE ULTRA 22



## ULTRA 22

Flow without filter  
approx. 10% higher

Flow diagram for air (20 °C / 68 °F)

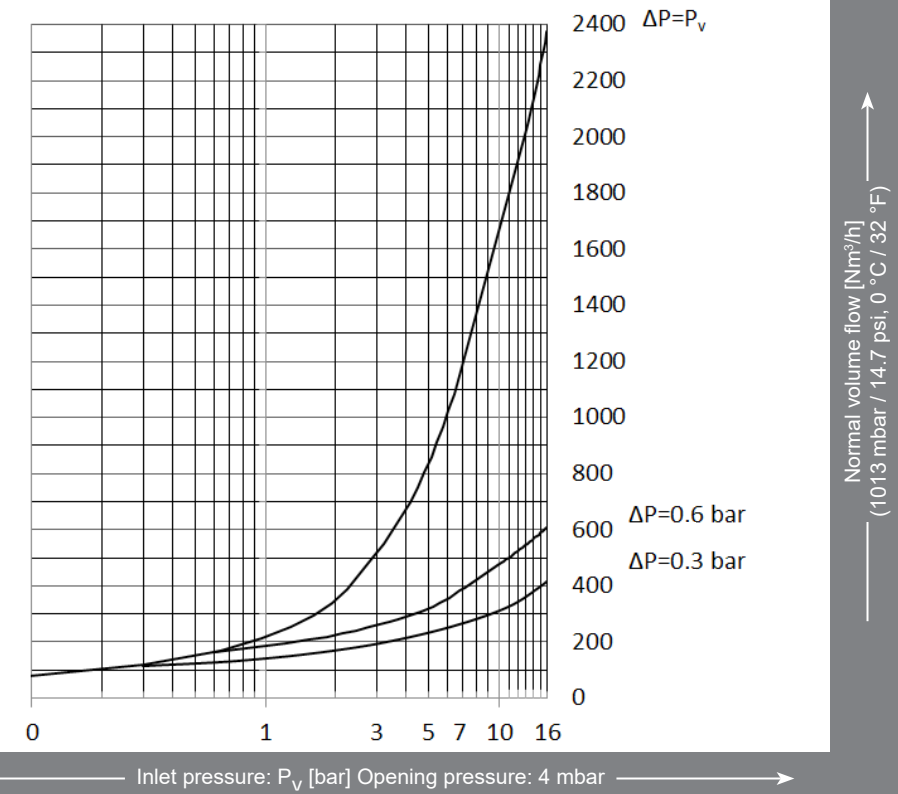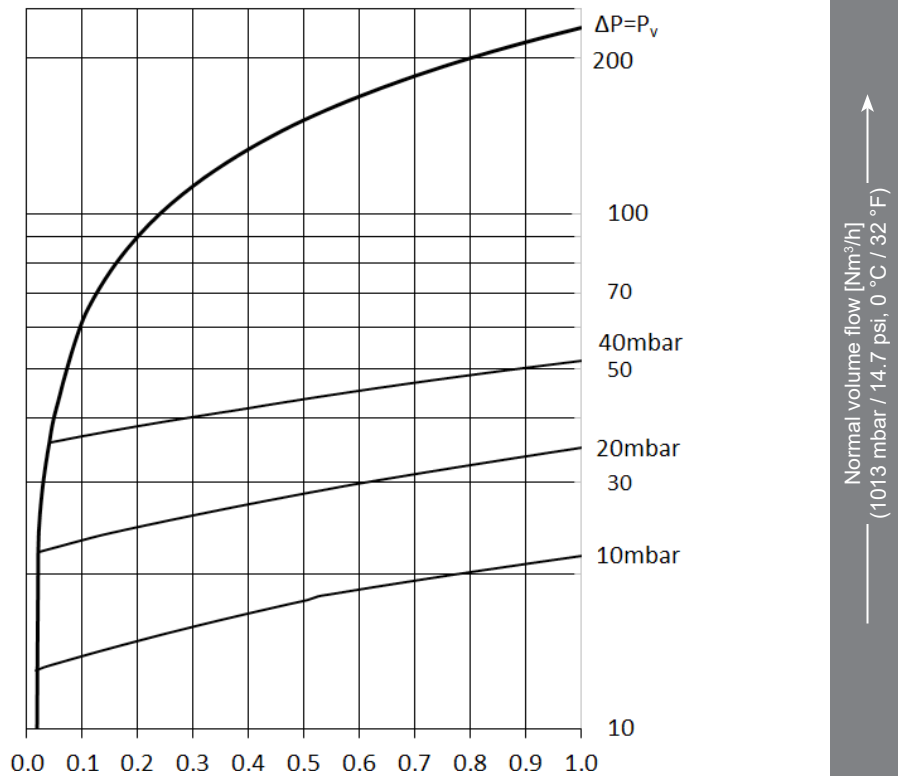

Conversion factors:

Natural gas	x 1.25
Ethylene	x 1.02
Methane	x 1.33
Propane	x 0.80
Oxygen	x 0.95
Town gas	x 1.54
Hydrogen	x 3.75

GRS12.1 USA - D02/3F - subject to change

# NON-RETURN VALVE ULTRA 22



## Examples for material combinations housing / elastomers

This overview shows only some possible material combinations and connections.

The modular system of ULTRA 22 offers many other diverse materials and combination possibilities.

Tell us your requirements and you will receive your individual non-return valve, precisely tailored to your application.

Model	Max. working pressure	[bar]	Filter 100 µm	Material				Connection [inch]	Order-No.
				Seals		Housing	Valve		
				O-Ring	Valve				
ULTRA 22	Acetylene (A)	1.5	—	EPDM	EPDM	Brass 2.0401 CuZn39Pb3	PEEK	G 1	036-001
	Carbon dioxide (CO <sub>2</sub> ), Argon (Ar), Helium (He), Town gas (C), Ethylene (E), Natural gas (M) and LPG (P), Hydrogen (H), Nitrogen (N <sub>2</sub> ), Carbon Monoxide (CO), Oxygen (O), Compressed air (D)	16.0	—	NBR	CR	Brass 2.0401 CuZn39Pb3	PEEK	G 1	036-003
	Carbon dioxide (CO <sub>2</sub> ), Argon (Ar), Helium (He), Town gas (C), Ethylene (E), Natural gas (M) and LPG (P), Hydrogen (H), Nitrogen (N <sub>2</sub> ), Carbon Monoxide (CO), Oxygen (O), Compressed air (D)	16.0	✓	NBR	NBR	Brass 2.0401 CuZn39Pb3	PEEK	G 1	036-032
	Acetylene (A)	1.5	—	EPDM	EPDM	Stainless steel 1.4305 X8 CrNiS 18-9 AISI 303	PEEK	G 1/2	036-007
	Argon (Ar), Helium (He), Hydrogen (H), Nitrogen (N <sub>2</sub> ), Carbon Monoxide (CO)	16.0							
	Argon (Ar), Helium (He), Town gas (C), Ethylene (E), Natural gas (M), and LPG (P), Hydrogen (H), Nitrogen (N <sub>2</sub> ), Carbon Monoxide (CO), Oxygen (O), Compressed air (D)	upon request	✓	NBR	CR	Aluminium 3.2315 AlSi1MgMn	PEEK	G 1	036-008
	Argon (Ar), Helium (He), Town gas (C), Natural gas (M), Hydrogen (H), Nitrogen (N <sub>2</sub> ), Carbon Monoxide (CO)		✓	ISO- LAST	ISO- LAST	Aluminium 3.2315 AlSi1MgMn	PEEK	G 1	036-009
	Argon (Ar), Helium (He), Town gas (C), Ethylene (E), Natural gas (M) and LPG (P), Hydrogen (H), Nitrogen (N <sub>2</sub> ), Carbon Monoxide (CO), Oxygen (O), Compressed air (D)	16.0	✓	FPM	FPM	Brass 2.0401 CuZn39Pb3	PEEK	G 1/2	036-013

Other gases and connections available upon request

Operating temperatures are depending to pressure, gas and seal material. Please do not hesitate to contact us.