


# WITT-SWITCH

## Control Unit for pressure regulating stations

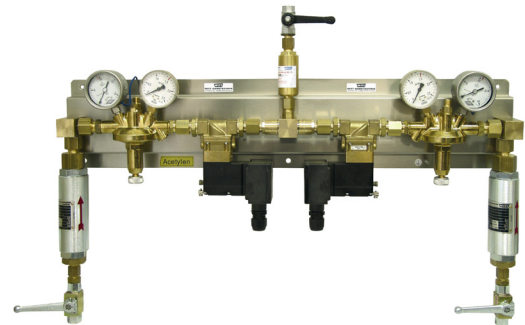

**Switch and Control Unit for automatic change over of pressure regulating stations. Provides a smooth process flow and optimal results with a continuous gas flow.**

### Benefits

- intelligent control, - the last selected gas supply will be activated after an emergency stop
- freely selectable side for starting
- compatible with WITT-Pressure regulating station
- quick and easy wall mounting
- optimal draw down of cylinder
- visual alarm
- status indication and operation by touch-screen
- integrated emergency cut-out

### Operation / Usage

- for automatic change over of pressure regulating stations for continuous gas withdrawal
- applicable for switching an emergency supply

### Function

- automatic change over with controlled limit values by two solenoid valves between two connected cylinders or cylinder bundles

### Options

- additional audible alarm device
- flashing beacon

### Approvals

Company certified according to ISO 9001

Technical Data	
Order-No.	194-019
Voltage	230 V AC, 24 V DC
Power consumption	max. 2.5 A
Housing	aluminium with plastic sheave
Enclosure rating	IP65
Temperature range	0 °C up to 70 °C 32 °F up to 158 °F
<b>Dimensions</b>	
Height	approx. 420 mm (16.54 inches)
Width	approx. 380 mm (14.96 inches)
Depth	approx. 280 mm (11.02 inches)
<b>Weight</b>	approx. 13.0 kg